



思科瑞系统
Security System


Shenzhen Security System Technology Co. Ltd



OVERVIEW

- Established in 2007 spring, SST provides a total solution for all RFID access control and time attendance applications.
SST operates from a modern 2,000m² factory and 500m² office in SHENZHEN special economic zone, and manufactures some of the world's most reliable & durable entrance control products. Products manufactured by SST include a full range of turnstiles, speed gates, parking systems, parking guidance system, hydraulic barriers, etc. A professional research, designing and development team is able to assist our clients from project conception, all the way through to on-site installation.
- Our customers range from global mining companies and financial service providers, to single-site retailers. The company is driven to provide products for access control solution. State of the art production processes and machinery combine to produce products of the highest quality which are trusted worldwide.
- All SST products offer fully integrated performance. All access control, ticketing and time & attendance systems are compatible with SST products.
- Our products including:
 - Turnstiles: tripod turnstile, flap turnstile, swing gate barrier, sliding turnstile, full height turnstile, waist high turnstile
 - Parking system: RFID parking system(Customized), parking barrier
 - Hydraulic system: Road blocker and rising bollard and tyre killer

Waist high turnstile SST-N7000

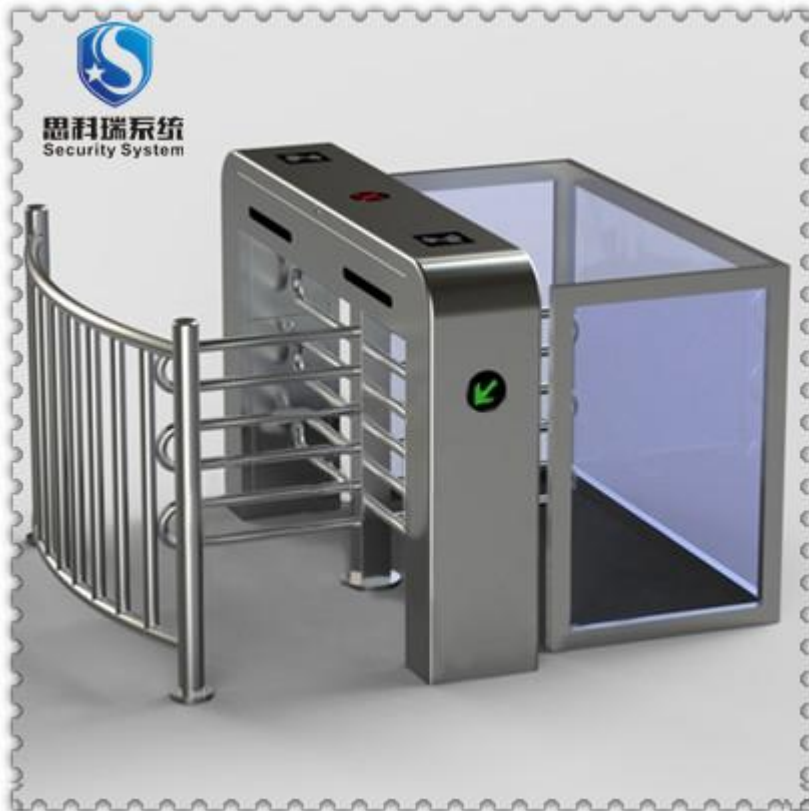

Product Introduction

Structure: Housing is made of 304stainless steel, stamping, rust-proof, easy-operation, no maintenance

Size: 1400L*1100W*1150Hmm

Arm length: 600mm

Weight: 100kg

Running direction: single direction, bi-direction

Working environment:
indoor, outdoor (awning better)

Parameters

1. Supply Voltage: AC220 \pm 10% V、50HZ
2. Working temperature: -35°C ~ 60°C
3. Relative humidity: \leq 95%, No Condensation
4. Communication Interface: RS485/Relay signal
5. Communication Distance: \leq 1200m
6. Passing speed: 30people/min

Waist high turnstile SST-N7001

Product Introduction

Structure: Housing is made of 304stainless steel, stamping, rust-proof, easy-operation, no maintainance

Size: 1400L*1100W*1150Hmm

Arm length: 600mm

Weight: 100kg

Running direction: single direction, bi-direction

Working environment: indoor, outdoor (under awning better)

Parameters

1. Supply Voltage: AC220 \pm 10% V、50HZ
2. Working temperature: -35 $^{\circ}$ C ~ 60 $^{\circ}$ C
3. Relative humidity: \leq 95%, No Condensation
4. Communication Interface: RS485/Relay signal
5. Communication Distance: \leq 1200m
6. Passing speed: 30people/min



Single lane full height turnstile SST-N4000



• Parameters :

1. Supply Voltage: AC220 \pm 10% V、50HZ
2. Drive Motor: DC 24V
3. Working temperature: -15OC - 60 OC
4. Relative humidity: \leq 95%, No Condensation
5. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
6. Communication Interface: RS485/Relay signal
7. Communication Distance: \leq 1200m
8. Arm Length: 600mm
9. Passing speed: 30people/min(normal open), 20people/min(normal close)

Size: 1630*1500*2300MM

Arm length : 600(mm)

Weight : 180kg

Running direction: Single direction, bi-direction

Single lane full height turnstile SST-N4001



• Parameters :

1. Supply Voltage: AC220 \pm 10% V、50HZ
2. Solenoid control
3. Working temperature: -15OC - 60 OC
4. Relative humidity: \leq 95%, No Condensation
5. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
6. Communication Interface: RS485/Relay signal
7. Communication Distance: \leq 1200m
8. Arm Length: 600mm
9. Passing speed: 30people/min(normal open), 20people/min(normal close)

Size: 1630*1500*2300MM

Arm length : 600(mm)

Weight : 180kg

Running direction: Single direction, bi-direction

Single lane full height turnstile SST-N4002



• Parameters :

1. Supply Voltage: AC220 \pm 10% V、50HZ
2. Solenoid control
3. Working temperature: -15OC - 60 OC
4. Relative humidity: \leq 95%, No Condensation
5. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
6. Communication Interface: RS485/Relay signal
7. Communication Distance: \leq 1200m
8. Arm Length: 600mm
9. Passing speed: 30people/min(normal open), 20people/min(normal close)

Size: 1630*1500*2300MM

Arm length : 600(mm)

Weight : 180kg

Running direction: Single direction, bi-direction

Double lane full height turnstile SST-N4004



• Parameters :

1. Supply Voltage: AC220 \pm 10% V、50HZ
2. Solenoid control
3. Working temperature: -15OC - 60 OC
4. Relative humidity: \leq 95%, No Condensation
5. Input Interface: +12 V level signal or pulse width $>$ DC12V pulse signal of 100ms
6. Communication Interface: RS485/Relay signal
7. Communication Distance: \leq 1200m
8. Arm Length:600mm
9. Passing speed: 30people/min(normal open),20people/min(normal close)

Size: L2450*W1500*H2300

Arm length : 600(mm)

Weight : 250kg

Running direction: Single direction, bi-direction

Double lane full height turnstile SST-N4005

• Parameters :


1. Supply Voltage: AC220 \pm 10% V、50HZ
2. Solenoid valve
3. Working temperature: -15OC - 60 OC
4. Relative humidity: \leq 95%, No Condensation
5. Input Interface: +12 V level signal or pulse width $>$ DC12V pulse signal of 100ms
6. Communication Interface: RS485/Relay signal
7. Communication Distance: \leq 1200m
8. Arm Length:600mm
9. Passing speed: 30people/min(normal open),20people/min(normal close)

Size: L2450*W1500*H2300

Arm length : 600(mm)

Weight : 250kg

Running direction: Single direction, bi-direction

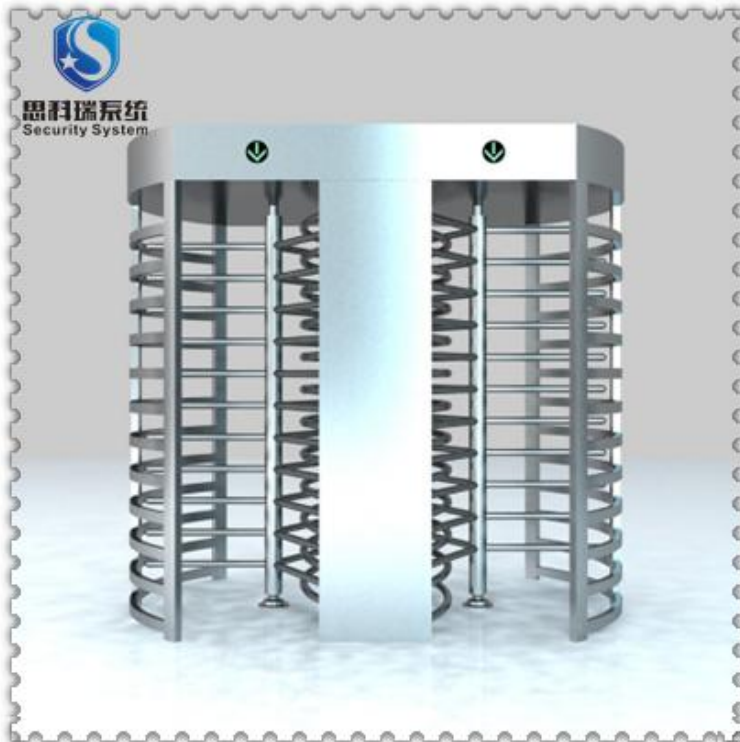



SECURITY SYSTEM TECHNOLOGY

思 科 瑞 系 統

系 統









THANKS