



**思科瑞系统**  
Security System


---

**Shenzhen Security System Technology Co. Ltd**

# OVERVIEW

- Established in 2007 spring, SST provides a total solution for all RFID access control and time attendance applications.  
SST operates from a modern 2,000m<sup>2</sup> factory and 500m<sup>2</sup> office in SHENZHEN special economic zone, and manufactures some of the world's most reliable & durable entrance control products. Products manufactured by SST include a full range of turnstiles, speed gates, parking systems, parking guidance system, hydraulic barriers, etc. A professional research, designing and development team is able to assist our clients from project conception, all the way through to on-site installation.
- Our customers range from global mining companies and financial service providers, to single-site retailers. The company is driven to provide products for access control solution. State of the art production processes and machinery combine to produce products of the highest quality which are trusted worldwide.
- All SST products offer fully integrated performance. All access control, ticketing and time & attendance systems are compatible with SST products.
- Our products including:
  - Turnstiles: tripod turnstile, flap turnstile, swing gate barrier, sliding turnstile, full height turnstile, waist high turnstile
  - Parking system: RFID parking system(Customized), parking barrier
  - Hydraulic system: Road blocker and rising bollard and tyre killer

## Tripod turnstile SST-N1000

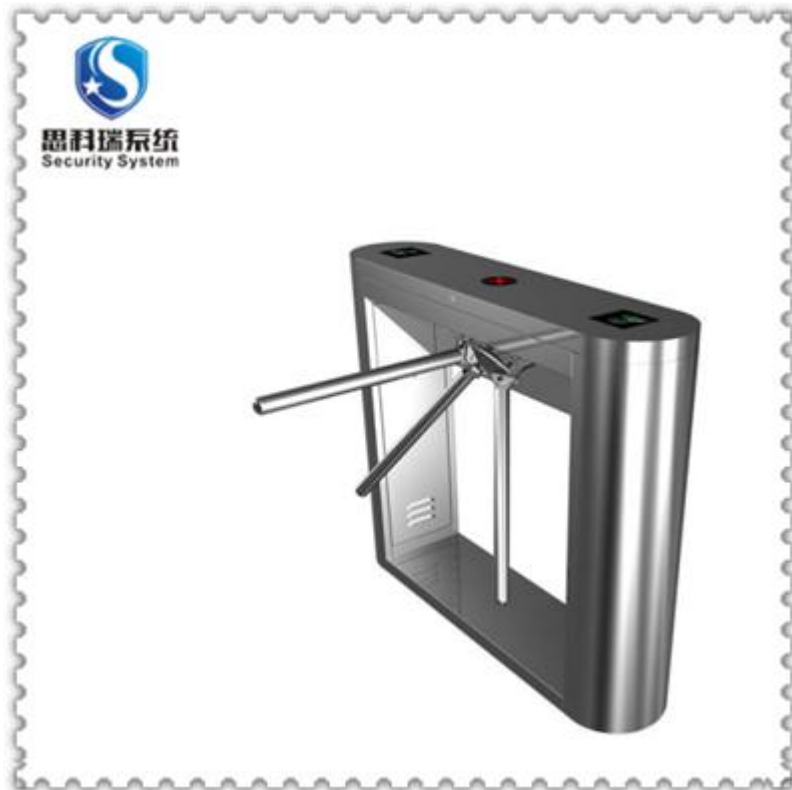

### • Parameters :

- 1. Supply Voltage: AC220V  $\pm$  10V 50Hz
- 2. Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- 3. Relative Humidity:  $\leq 95\%$ , No Condensation
- 4. Max Access Width: 600mm
- 5. Passing Speed: 30people/min
- 6. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
- 7. Drive Current > 10mA
- 8. Communication interface : RS485/Relay signal
- 9. Commincation distance :  $\leq 1200\text{m}$

Size: L1200xW280xH980mm


Material: 304 Stainless Steel

Weight : 60Kg

Arm length: 500(mm)

Arm turning direction: Single direction, bi-direction(optional)

## Tripod turnstile SST-N1001

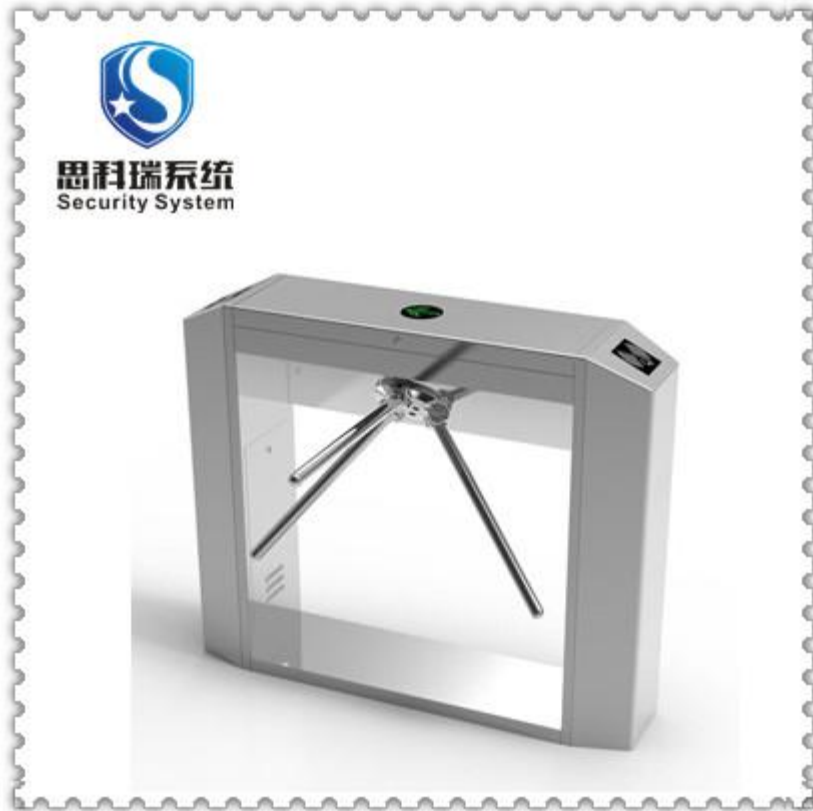

### • Parameters :

- 1.Supply Voltage: AC220V  $\pm$  10V 50Hz
- 2.Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- 3.Relative Humidity:  $\leq 95\%$ , No Condensation
- 4.Max Access Width: 600mm
- 5.Passing Speed: 30people/min
- 6.Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
- 7.Drive Current > 10mA
- 8.Communication interface: RS485/Relay signal
- 9. Commincation distance :  $\leq 1200\text{m}$

Size: L1200xW280xH980mm

Material: 304 Stainless Steel

Weight : 60Kg

Arm length: 500(mm)

Arm turning direction: Single direction,bi-direction (optional)

Extended function: Coin collection access control

## Tripod turnstile SST-N1002

### • Parameters :

- 1.Supply Voltage: AC220V  $\pm$  10V 50Hz
- 2.Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- 3.Relative Humidity:  $\leq 95\%$ , No Condensation
- 4.Max Access Width: 600mm
- 5.Passing Speed: 30people/min
- 6.Input Interface: +12 V level signal or pulse width  $>$  DC12V pulse signal of 100ms
- 7.Drive Current  $>$  10mA
- 8.Communication interface: RS485/Relay signal
- 9. Commincation distance :  $\leq 1200\text{m}$

Size: L1200xW280xH980mm

Material: 304 Stainless Steel

Weight : 60Kg

Arm length: 500(mm)

Arm turning direction: Single direction,bi-direction(optional)



## Tripod turnstile SST-N1003



### • Parameters :

- 1. Supply Voltage: AC220V  $\pm$  10V 50Hz
- 2. Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- 3. Relative Humidity:  $\leq 95\%$ , No Condensation
- 4. Max Access Width: 600mm
- 5. Passing Speed: 30people/min
- 6. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
- 7. Drive Current > 10mA
- 8. Communication interface: RS485/Relay signal
- 9. Commincation distance :  $\leq 1200\text{m}$

Size: L1200xW280xH980mm


Material: 304 Stainless Steel

Weight : 60Kg

Arm length: 500(mm)

Arm turning direction: Single direction, bi-direction(optional)

## Tripod turnstile SST-N1004

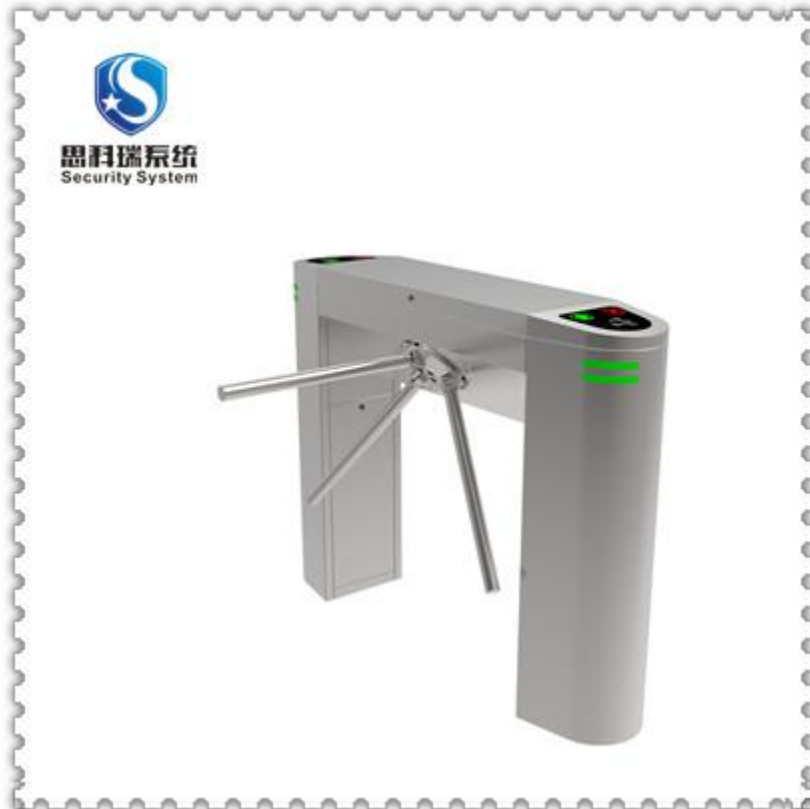

### • Parameters :

- 1. Supply Voltage: AC220V  $\pm$  10V 50Hz
- 2. Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- 3. Relative Humidity:  $\leq 95\%$ , No Condensation
- 4. Max Access Width: 600mm
- 5. Passing Speed: 30people/min
- 6. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
- 7. Drive Current > 10mA
- 8. Communication interface: RS485/Relay signal
- 9. Commincation distance :  $\leq 1200\text{m}$

Size: L1400xW280xH980mm

Material: 304 Stainless Steel

Weight : 60Kg

Arm length: 500(mm)

Arm turning direction: Single direction, bi-direction(optional)

## Tripod turnstile SST-N1005



### • Parameters :

- 1. Supply Voltage: AC220V  $\pm$  10V 50Hz
- 2. Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- 3. Relative Humidity:  $\leq 95\%$ , No Condensation
- 4. Max Access Width: 600mm
- 5. Passing Speed: 30people/min
- 6. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
- 7. Drive Current > 10mA
- 8. Communication interface: RS485/Relay signal
- 9. Commincation distance :  $\leq 1200\text{m}$

Size: L1200xW280xH980mm

Material: 304 Stainless Steel

Weight : 60Kg

Arm length: 500(mm)

Arm turning direction: Single direction, bi-direction(optional)



Tel: 008618925270403 (what's app) Elena Lee  
Email:sales5@sz-sstc.com Skype:szsstc1

## Tripod turnstile SST-SE1000



### • Parameters :

- 1. Supply Voltage: AC220V  $\pm$  10V 50Hz
- 2. Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- 3. Relative Humidity:  $\leq 95\%$ , No Condensation
- 4. Max Access Width: 600mm
- 5. Passing Speed: 30people/min
- 6. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
- 7. Drive Current > 10mA
- 8. Communication interface: RS485/Relay signal
- 9. Communication distance :  $\leq 1200\text{m}$

Size: L1200xW280xH980mm

Material: 304 Stainless Steel

Weight : 60Kg

Arm length: 500(mm)

Arm turning direction: Single direction, bi-direction(optional)

## Vertical tripod turnstile SST-N1007



### • Parameters :

- 1. Supply Voltage: AC220V  $\pm$  10V 50Hz
- 2. Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- 3. Relative Humidity:  $\leq 95\%$ , No Condensation
- 4. Max Access Width: 600mm
- 5. Passing Speed: 30people/min
- 6. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
- 7. Drive Current > 10mA
- 8. Communication interface: RS485/Relay signal
- 9. Commincation distance :  $\leq 1200\text{m}$

Size: 480L\*W280\*H980mm

Material: 304 Stainless Steel

Weight : 40Kg

Arm length: 500(mm)

Arm turning direction: Single direction,bi-direction(optional)

Tel: 008618925270403 (what's app) Elena Lee  
Email:sales5@sz-sstc.com Skype:szsstc1

## Vertical tripod turnstile SST-N1009



### • Parameters:

1. Supply Voltage: AC220V  $\pm$  10V 50Hz
2. Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
3. Relative Humidity:  $\leq 95\%$ , No Condensation
4. Max Access Width: 600mm
5. Passing Speed: 30people/min
6. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
7. Drive Current > 10mA
8. Communication interface: RS485/Relay signal
9. Commincation distance :  $\leq 1200\text{m}$

Size: 420L\*W340\*H980mm

Material: 304 Stainless Steel

Weight : 40Kg

Arm length: 500(mm)

Arm turning direction: Single direction,bi-direction(optional)

Tel: 008618925270403 (what's app) Elena Lee  
Email:sales5@sz-sstc.com Skype:szsstc1

## Double mechanism tripod turnstile SST-N1010

### • Parameters:

1. Supply Voltage: AC220V  $\pm$  10V 50Hz
2. Working temperature:  $-35^{\circ}\text{C} \sim 60^{\circ}\text{C}$
3. Relative Humidity:  $\leq 95\%$ , No Condensation
4. Max Access Width: 600mm
5. Passing Speed: 30people/min
6. Input Interface: +12 V level signal or pulse width > DC12V pulse signal of 100ms
7. Drive Current > 10mA
8. Communication interface: RS485/Relay signal
9. Commincation distance :  $\leq 1200\text{m}$

Size: 550L\*W420\*H980mm

Material: 304 Stainless Steel

Weight : 55Kg

Arm length: 520(mm)

Arm turning direction: Single direction,bi-direction(optional)





SECURITY SYSTEM TECHNOLOGY

思 科 瑞 系 統

系 統















THANKS